OUTDOOR LIGHTING

HYVE 22

GENERAL

HYVE 22

Article number	10104050
Category	integrated
Light source	LED
Color changing	no
Warranty	5 years

DIMENSIONS

Length	-
Width	-
Height	32 mm / 1.26”
Diameter	22 mm / 0.87”
Total height	-
Recess depth	50 mm / 1.97”

ELECTRONICS

Voltage	12V AC
Output	0.20 Watt
VA	0.20
Power factor	1.00
Light source	3x SMD-LED 0.60W
Lifetime	25000 hours
Dimmable	no
Length of cable lead	600 mm / 24’’

LIGHT SPECIFICATIONS

Color temperature	3100 K
CRI (RA)	93
Luminous intensity	2.20 Cd
Light beam 0-180	60°
Light beam 90-270	60°
Net luminous flux	2 lumen
Luminous efficiency	10 lumenwatt

MATERIAL

Ring Plate	-
Lens	polycarbonate
Exterior	polycarbonate
Easy Lock included	yes
Installation hardware included	yes

AVAILABLE PRODUCT COLORS

-

AVAILABLE ACCESSORIES

-

PROTECTION RATING

IP : 67

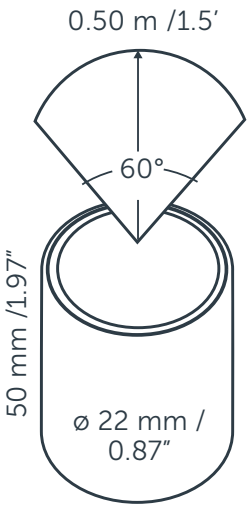

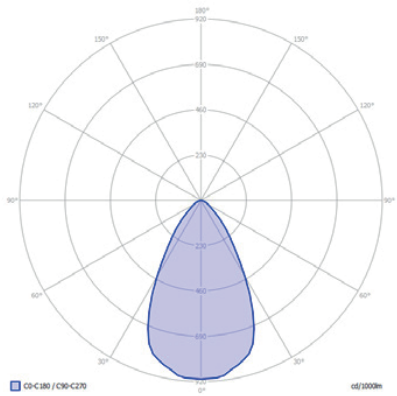

in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
24	0.35	0.3
6	0.69	0.6
3	1.04	0.9
2	1.39	1.2
1	1.73	1.5
1	2.08	1.8
Beam angle (0-180°) (90-270°): 60° edge illuminance is 1/2 of Centre beam		

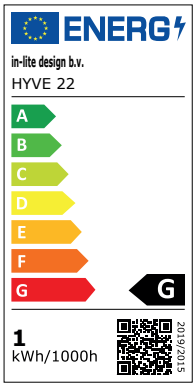

12 VOLT

CRI 90

c UL us LISTED

in-lite®