

# FLUX



## GENERAL

FLUX  
 Article number \_\_\_\_\_ 10103201  
 Category \_\_\_\_\_ integrated  
 Light source \_\_\_\_\_ LED  
 Color changing \_\_\_\_\_ no  
 Warranty \_\_\_\_\_ 5 years

## DIMENSIONS

Length \_\_\_\_\_ -  
 Width \_\_\_\_\_ -  
 Height \_\_\_\_\_ 42 mm / 1.65"  
 Diameter \_\_\_\_\_ 60 mm / 2.36"  
 Total height \_\_\_\_\_ -  
 Recess depth \_\_\_\_\_ 55 mm / 2.17"

## ELECTRONICS

Voltage \_\_\_\_\_ 12V AC  
 Output \_\_\_\_\_ 1.50 Watt  
 VA \_\_\_\_\_ 2.50  
 Power factor \_\_\_\_\_ 0.60  
 Light source \_\_\_\_\_ 3x SMD-LED 0.5W  
 Lifetime \_\_\_\_\_ 25000 hours  
 Dimmable \_\_\_\_\_ no  
 Length of cable lead \_\_\_\_\_ 600 mm / 24"

## LIGHT SPECIFICATIONS

Color temperature \_\_\_\_\_ 3000 K  
 CRI (RA) \_\_\_\_\_ 92  
 Luminous intensity \_\_\_\_\_ 459.10 Cd  
 Light beam 0-180 \_\_\_\_\_ 24°  
 Light beam 90-270 \_\_\_\_\_ 24°  
 Net luminous flux \_\_\_\_\_ 99 lumen  
 Luminous efficiency \_\_\_\_\_ 66 lumenwatt

## MATERIAL

Ring Plate \_\_\_\_\_ Stainless Steel  
 Lens \_\_\_\_\_ polycarbonate  
 Exterior \_\_\_\_\_ polycarbonate  
 Easy Lock included \_\_\_\_\_ yes  
 Installation hardware included \_\_\_\_\_ yes

## AVAILABLE PRODUCT COLORS



■ Stainless steel

## AVAILABLE ACCESSORIES

BOX 100, PLATE 75

## PROTECTION RATING

IP : 67

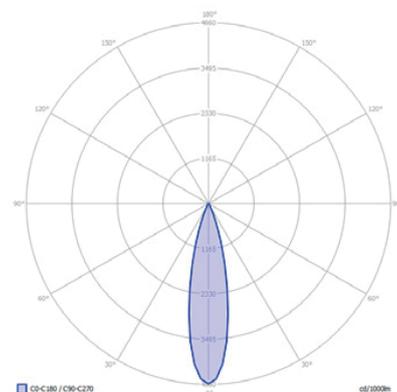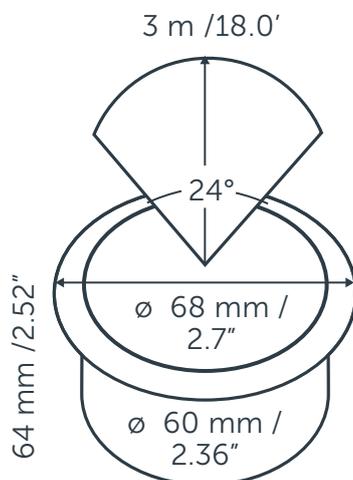

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
18	2.13	5.0
5	4.25	10.0
2	6.38	15.0
1	8.50	20.0
1	10.63	25.0
1	12.75	30.0

Beam angle (0-180°) (90-270°): 24°  
edge illuminance is 1/2 of Centre beam

12 VOLT



**ENERGY**  
in-lite design b.v.  
FLUX

A  
B  
C  
D  
E  
F  
G

**1**  
kWh/1000h

2019/2015

in-lite®