

HYVE



GENERAL

HYVE
 Article number _____ 10103900
 Category _____ integrated
 Light source _____ LED
 Color changing _____ no
 Warranty _____ 5 years

DIMENSIONS

Length _____ -
 Width _____ -
 Height _____ 40 mm / 1.57"
 Diameter _____ 60 mm / 2.36"
 Total height _____ -
 Recess depth _____ 55 mm / 2.17"

ELECTRONICS

Voltage _____ 12V AC
 Output _____ 0.80 Watt
 VA _____ 0.80
 Power factor _____ 1.00
 Light source _____ 24x SMD-LED 0.06W
 Lifetime _____ 25000 hours
 Dimmable _____ no
 Length of cable lead _____ 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature _____ 3000 K
 CRI (RA) _____ 95
 Luminous intensity _____ 11.20 Cd
 Light beam 0-180 _____ 74°
 Light beam 90-270 _____ 74°
 Net luminous flux _____ 17 lumen
 Luminous efficiency _____ 21 lumenwatt

MATERIAL

Ring Plate _____ Stainless Steel
 Lens _____ polycarbonate
 Exterior _____ polycarbonate
 Easy Lock included _____ yes
 Installation hardware included _____ yes

AVAILABLE PRODUCT COLORS



■ Stainless steel

AVAILABLE ACCESSORIES

BOX 100, PLATE 75

PROTECTION RATING

IP : 67

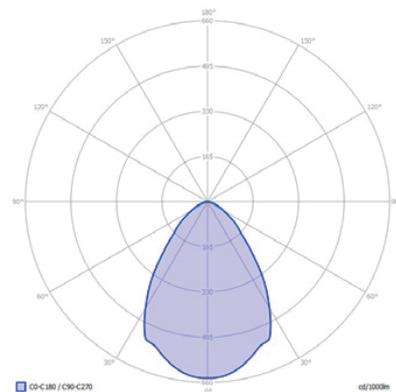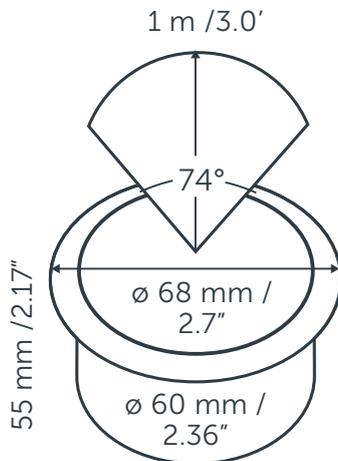

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
11	1.51	1.0
4	2.41	1.6
2	3.32	2.2
1	4.22	2.8
1	5.12	3.4
1	6.03	4.0

Beam angle (0-180°) (90-270°): 74°
edge illuminance is 1/2 of Centre beam

12 VOLT



ENERGY
in-lite design b.v.
HYVE

A
B
C
D
E
F
G

1
kWh/1000h

2019/2015

in-lite®