

OUTDOOR LIGHTING

# SWAY TABLE



## GENERAL

SWAY TABLE  
Article number 10202460  
Category -  
Light source LED  
Warranty -

## DIMENSIONS

Length -  
Width -  
Height 345 mm / 13.5"  
Diameter 150 mm / 5.9"  
Total height -  
Recess depth -

## ELECTRONICS

Voltage 5V DC, 1A  
Output 1.8 Watt  
VA 1.8  
Power factor 1  
Light source 24x SMD 0.06 W  
Lifetime 25000 hours  
Battery life Stand 1 = 14 uur  
Stand 2 = 23 uur  
Stand 3 = 38 uur  
Stand 4 = 63 uur  
Energy label G  
Dimmable yes  
Length of cable lead -

Opladen 5.0V via micro-USB, min. stroom 1A (lader moet minimaal 1A kunnen leveren, anders langere laadtijd)  
Beveiliging ESD beveiliging  
Overlaad beveiliging  
Over ontlading beveiliging  
Temperatuur beveiliging  
Automatisch uitschakelen bij accuspanning van 3.5V

## LIGHT SPECIFICATIONS

Color temperature 2900 K  
CRI (RA) 96  
Luminous intensity 40.7 Cd  
Light beam 0-180 97°  
Light beam 90-270 97°  
Net luminous flux 110 lumen  
Luminous efficiency 62 lumenwatt

## MATERIAL



Color black  
Lens polycarbonate  
Exterior polycarbonate

## AVAILABLE ACCESSORIES

-

## PROTECTION RATING

IP : 55

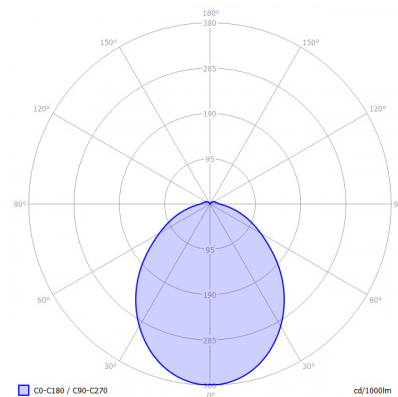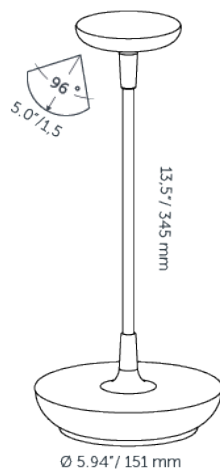

in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
16	3.62	1.6
8	5.19	2.3
5	6.78	3.0
3	8.36	3.7
2	9.95	4.4
2	11.53	5.1

Beam angle (0-180°) (90-270°): 97°  
edge illuminance is 1/2 of Centre beam

12 VOLT



**ENERGY**  
in-lite design b.v.  
SWAY TABLE

A  
B  
C  
D  
E  
F  
G

2 kWh/1000h

2019/2015

in-lite®