

EVO FLEX 2

GENERAL

EVO FLEX 2 (incl. DRIVER)
 Article number:
 EVO FLEX 2 10250305
 DRIVER 10250330
 Category: Surface Light
 Light source: LED
 Warranty: 5 years


DIMENSIONS

Length: 2000 mm / 78.74"
 Width: 6.5 mm / 0.26"
 Height: 12 mm / 0.47"
 Diameter: -
 Total height: -
 Recess depth: -

ELECTRONICS

Voltage: 12V AC
 Output: 11.00 Watt
 VA: 15.70
 Power factor: 0.70
 Light source: -
 Lifetime: 25.000 hours
 Energy label: B
 Dimmable: no

Length of cable lead:
 Complete length DRIVER incl. cable 920 mm
 From DRIVER to EASY-LOCK 720 mm
 From DRIVER to MINI CONNECTOR 110 mm
 From EVO FLEX to MINI CONNECTOR 110 mm

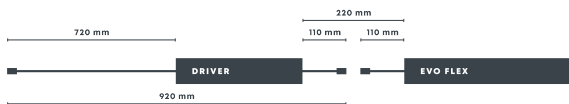

MATERIAL

Ring / Plate: -
 Lens: -
 Exterior: PU
 Easy Lock: included
 Water resistant: yes

AVAILABLE ACCESSORIES

EVO FLEX PROFILE
 EVO FLEX CLIPS
 EVO FLEX CORNER OUTSIDE
 EVO FLEX CORNER INSIDE
 EVO FLEX-EXT CORD 1

AVAILABLE COLORS

White



PROTECTION RATING

IP : 68

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance
[m]	[ft]	[m]	[ft]	[m]	[ft]	[lux]
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
0.50	1.64	1.92	6.30	1.92	6.30	*

LIGHT SPECIFICATIONS

Color temperature: 3000 K
 CRI (RA): 86
 Luminous intensity: 121,90 Cd
 Light beam 0-180: 125°
 Light beam 90-270: 125°
 Net luminous flux: 410 lumen
 Luminous efficiency: 37 lumen/Watt

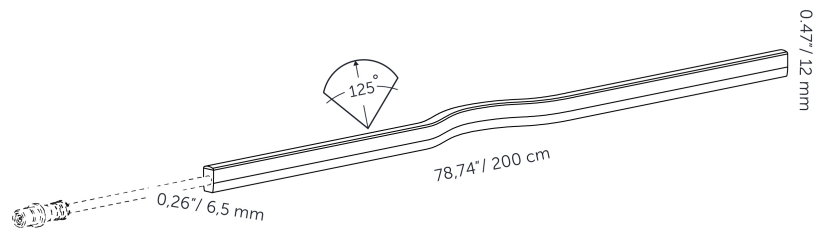

in-lite®

12 volt

