

EVO FLEX 3

GENERAL

EVO FLEX 3 (incl. DRIVER)
 Article number:
 EVO FLEX 3 10250310
 DRIVER 10250330
 Category: Surface Light
 Light source: LED
 Warranty: 5 years


DIMENSIONS

Length: 3000 mm / 118.11"
 Width: 6,5 mm / 0.26"
 Height: 12 mm / 0.47"
 Diameter: -
 Total height: -
 Recess depth: -

ELECTRONICS

Voltage: 12V AC
 Output: 14.50 Watt
 VA: 20.20
 Power factor: 0.72
 Light source: -
 Lifetime: 25.000 hours
 Energy label: B
 Dimmable: no

Length of cable lead:
 Complete length DRIVER incl. cable 920 mm
 From DRIVER to EASY-LOCK 720 mm
 From DRIVER to MINI CONNECTOR 110 mm
 From EVO FLEX to MINI CONNECTOR 110 mm



LIGHT SPECIFICATIONS

Color temperature: 3000 K
 CRI (RA): 86
 Luminous intensity: 159,20 Cd
 Light beam 0-180: 125°
 Light beam 90-270: 125°
 Net luminous flux: 534 lumen
 Luminous efficiency: 37 lumen/Wat

MATERIAL

Ring / Plate: -
 Lens: -
 Exterior: PU
 Easy Lock: included
 Water resistant: yes

AVAILABLE ACCESSORIES

EVO FLEX PROFILE
 EVO FLEX CLIPS
 EVO FLEX CORNER OUTSIDE
 EVO FLEX CORNER INSIDE
 EVO FLEX-EXT CORD 1


AVAILABLE COLORS

White

PROTECTION RATING

IP : 68

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance
[m]	[ft]	[m]	[ft]	[m]	[ft]	[lux]
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
*	*	*	*	*	*	*
0.50	1.64	1.92	6.30	1.92	6.30	*

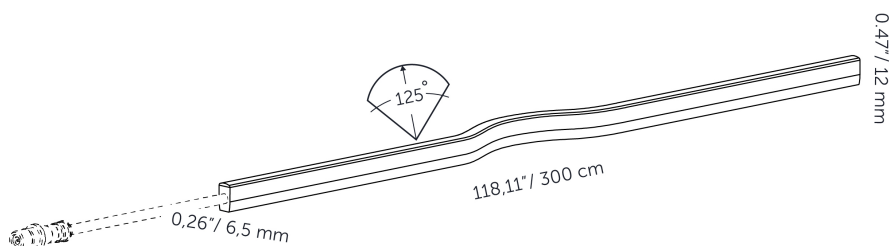

in-lite®

12 volt

